


Installation Sheet

Astro Trend



Revision 1 - 26th September 2025

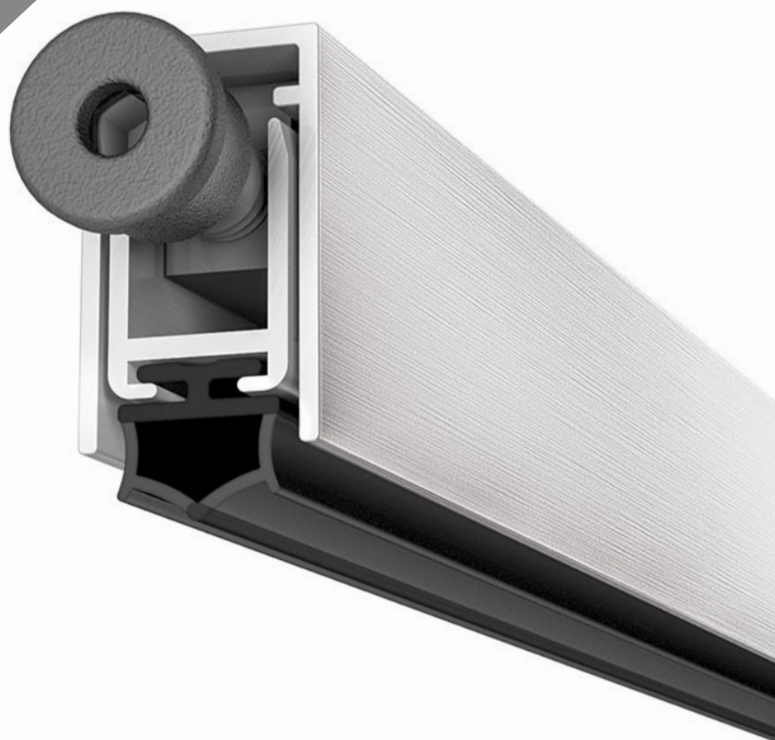

Astro Trend

Tools & Equipment

- Saw
- Tape measure
- Pencil or marker
- Drill and bits
- File

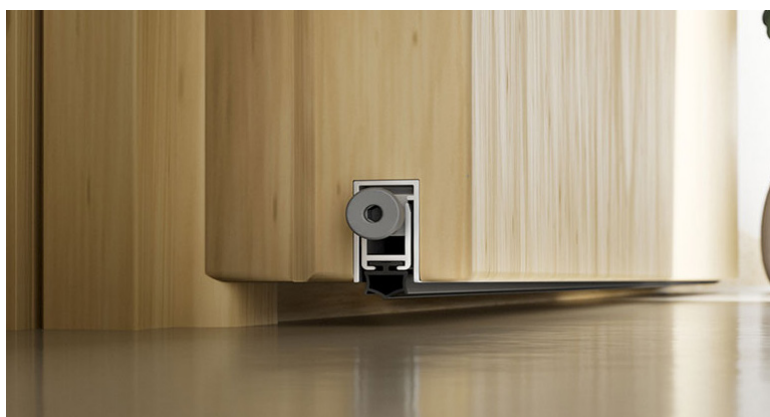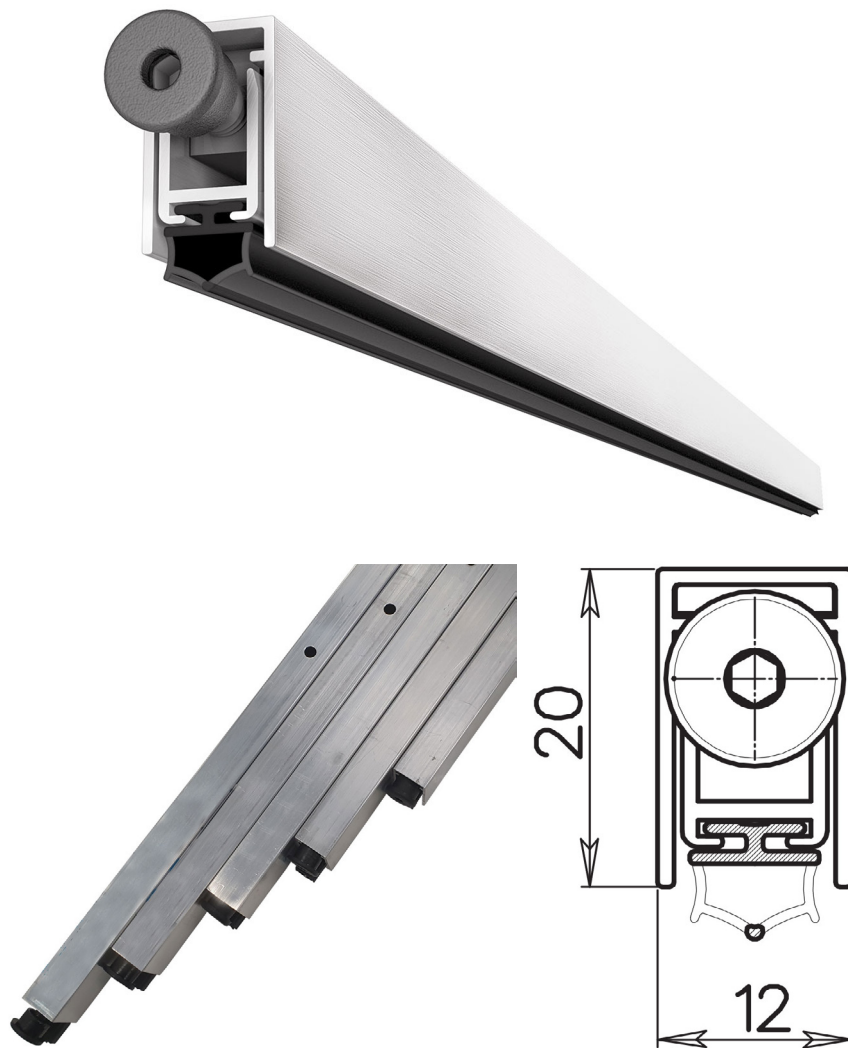

Introduction

The Astro Trend Drop Down Seal a cost-effective and reliable solution for sealing the bottom of timber doors. This rebated drop-down seal automatically closes the gap between the door and the floor, helping to prevent noise, smoke and drafts.



Please read this instruction carefully before installing and using the device. The protective function and any possible guarantee of the device might be affected if you do not follow the instructions. Pass the instructions to the end user for future reference.

Installation: Measurement

1a. Remove the door from its hinges.




1b. Measure the width of the door and subtract 3 millimeters, which corresponds to the thickness of the cap.

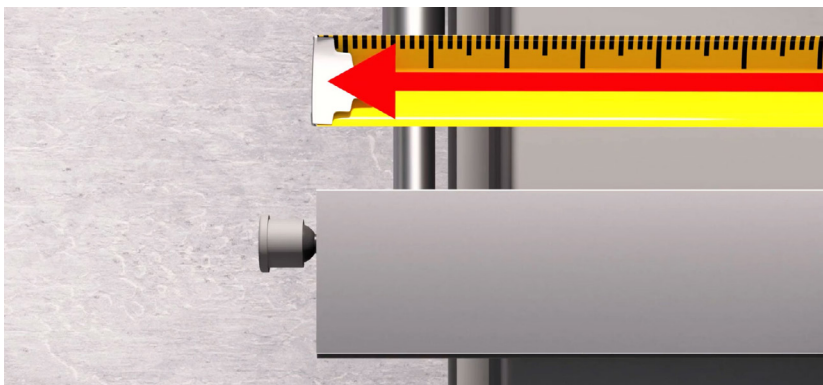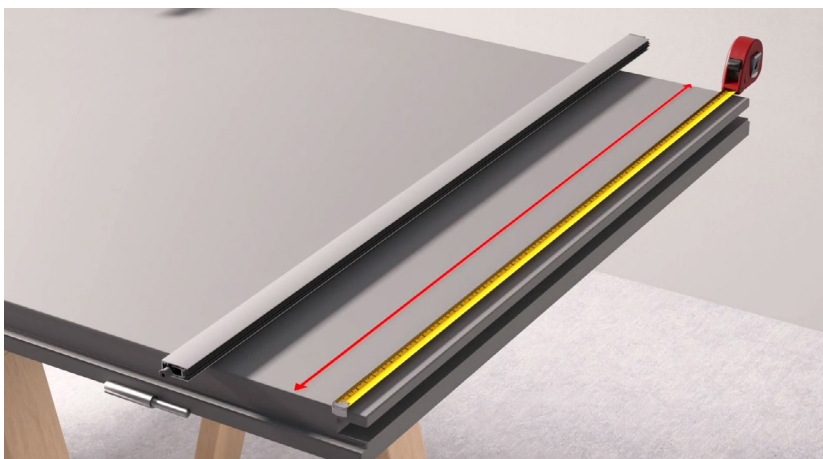


Installation: Measurement

1c. Mark the value on the drop seal and remove the cap.

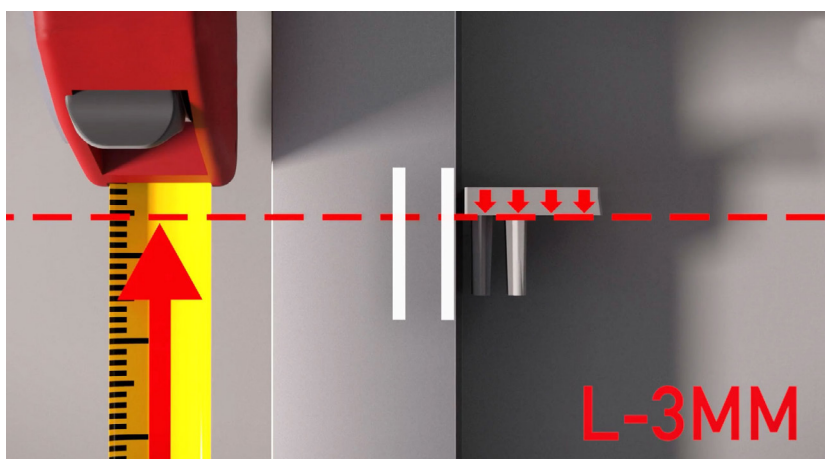

Installation: Cut

2a. Cut back the drop seal using a power saw or a hack saw.


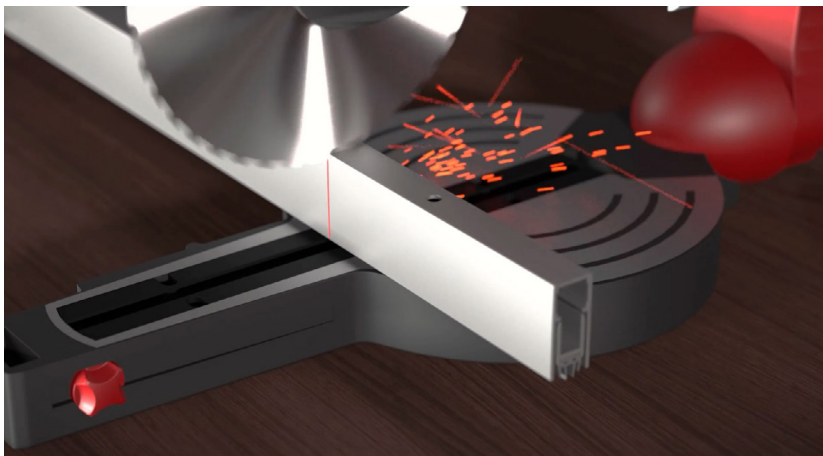


2b. Remove any excess debris and reinsert the cap




Installation: Fixing


3a. Insert the drop seal into the groove, ensuring the actuator bottom is on the hinge side.

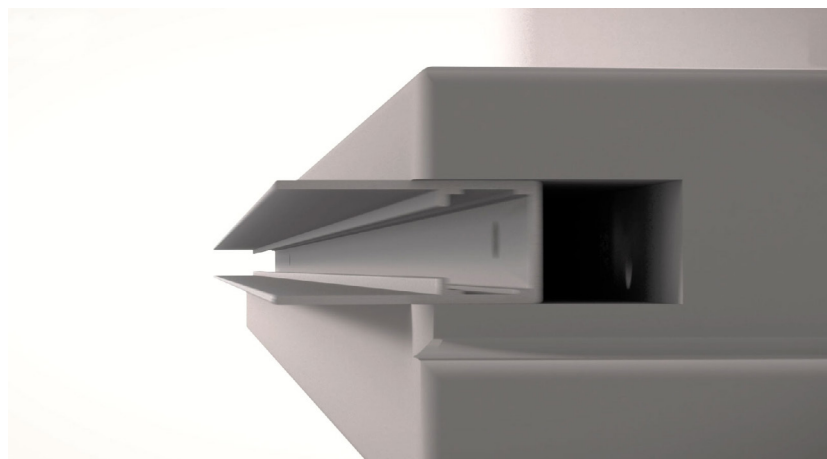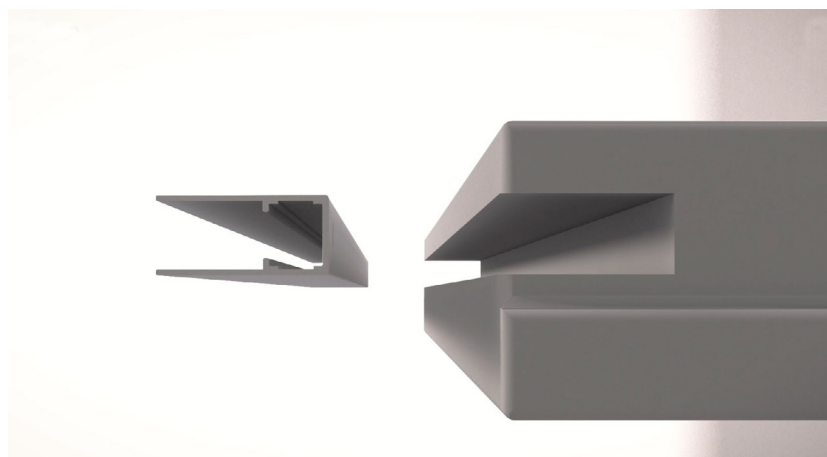

3b. Partially slide out the silicone gasket to reveal the fixing holes.


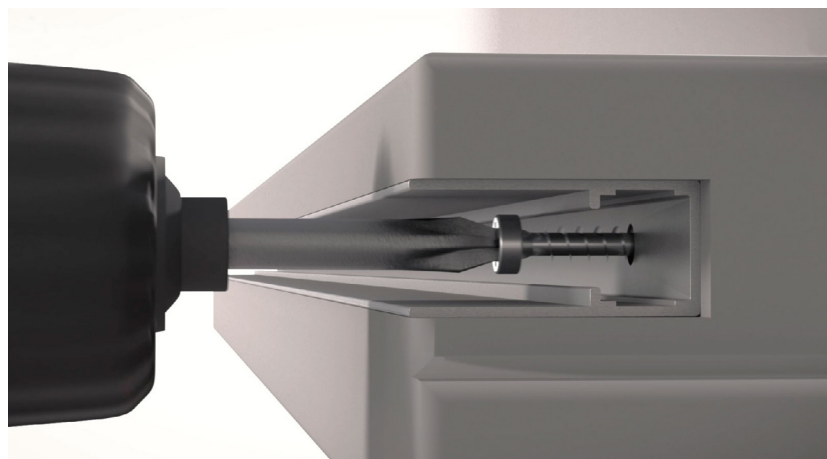


3c. Fix the drop seal to the door leaf using the screws provided.

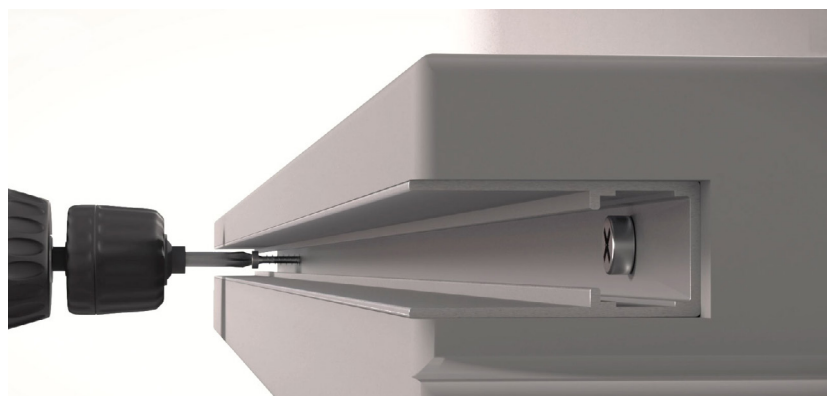

Installation: Fixing

3d. Slide the gasket back into place.

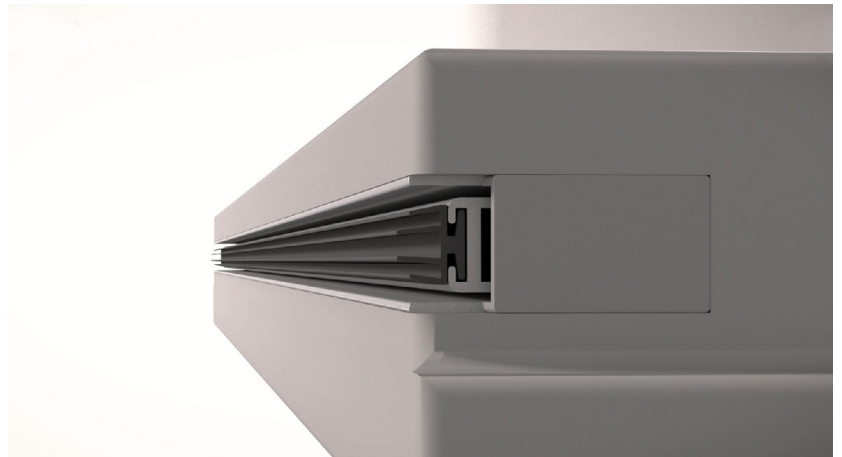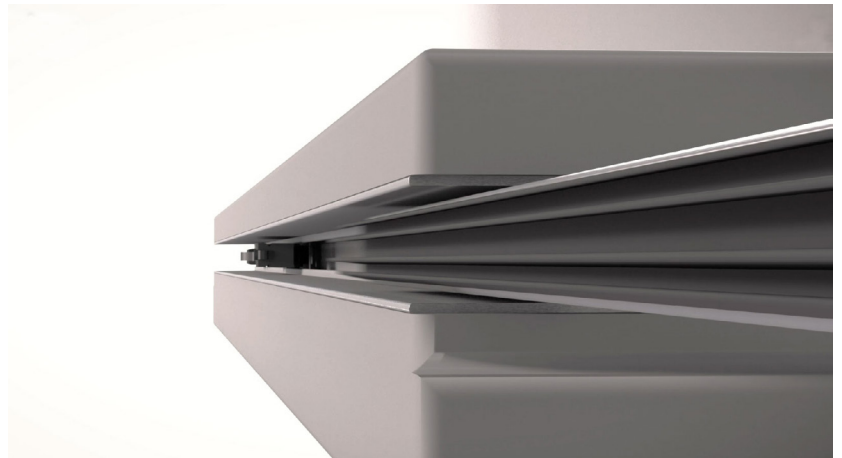

Installation: Plunger - Type "1"

Type "1"



4a. Observe the seal and adjust it using a 3-millimeter Allen wrench to rotate the button.




Type "1"

4b. Turn clockwise to reduce the movement of the seal or counterclockwise to increase it.



Type "1"

4c. Make sure the gasket makes contact with the floor.

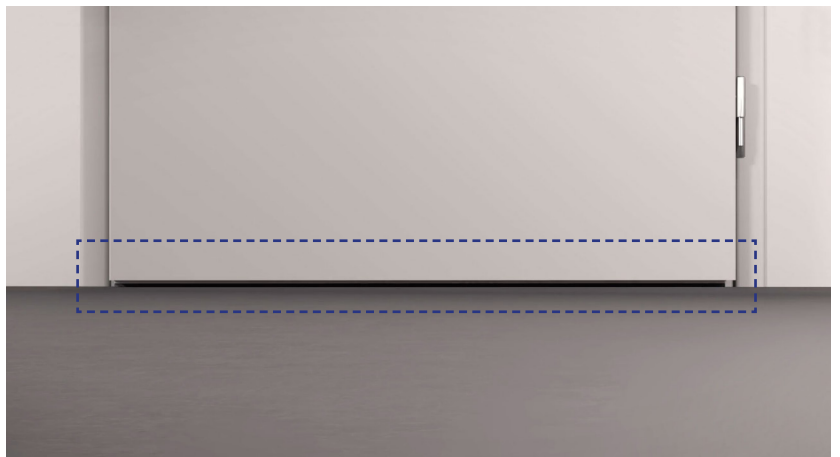

Installation: Plunger - Type "4"

Type "4"




4a. Observe the seal and adjust accordingly by pulling out the actuator button clear of the housing.




Type "4"

4b. Rotate clockwise to reduce movement or anti-clockwise to increase seal movement.

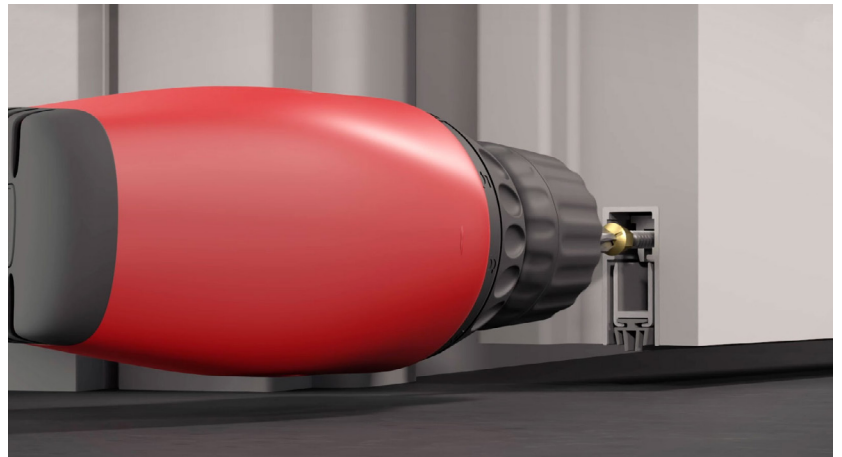

Type "4"

4c. Ensure the seal makes contact with the floor.

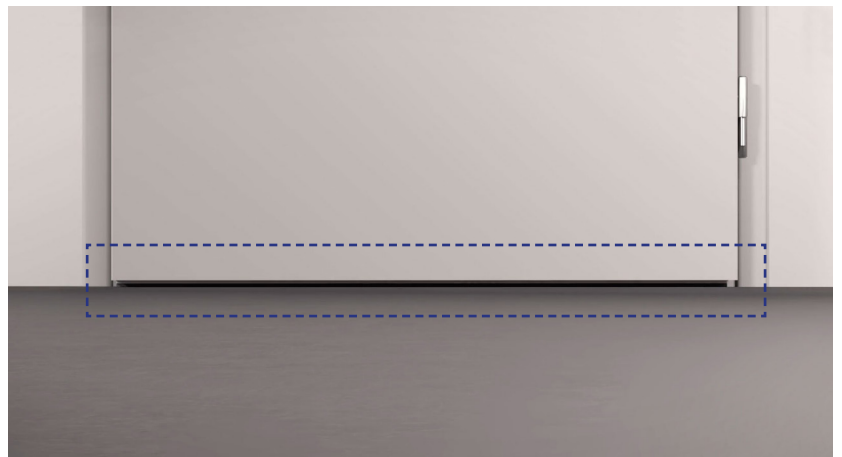


Installation: Plunger - Type "17"

Type "17"




4a. Observe the seal and adjust accordingly by pulling out the actuator button clear of the housing.

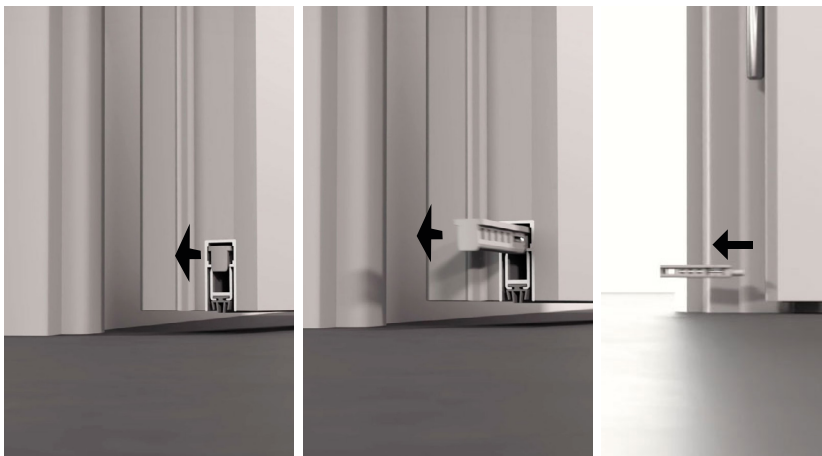


Type "17"

4b. Rotate clockwise to reduce movement or anti-clockwise to increase seal movement.

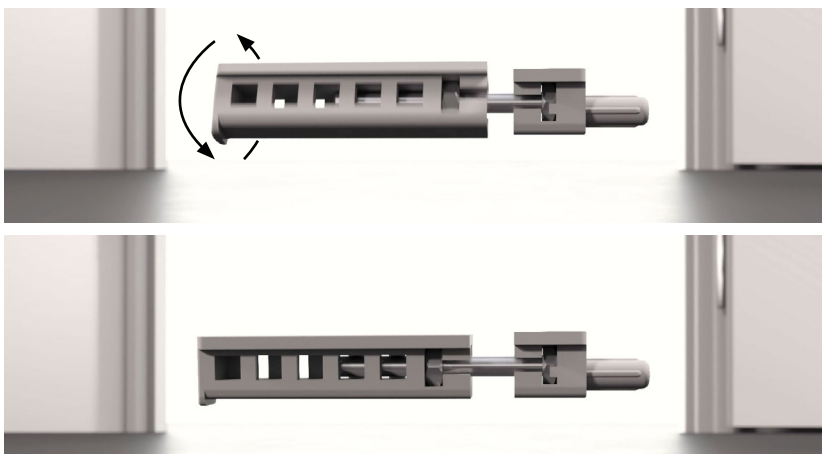

Type "17"

4c. Ensure the seal makes contact with the floor.

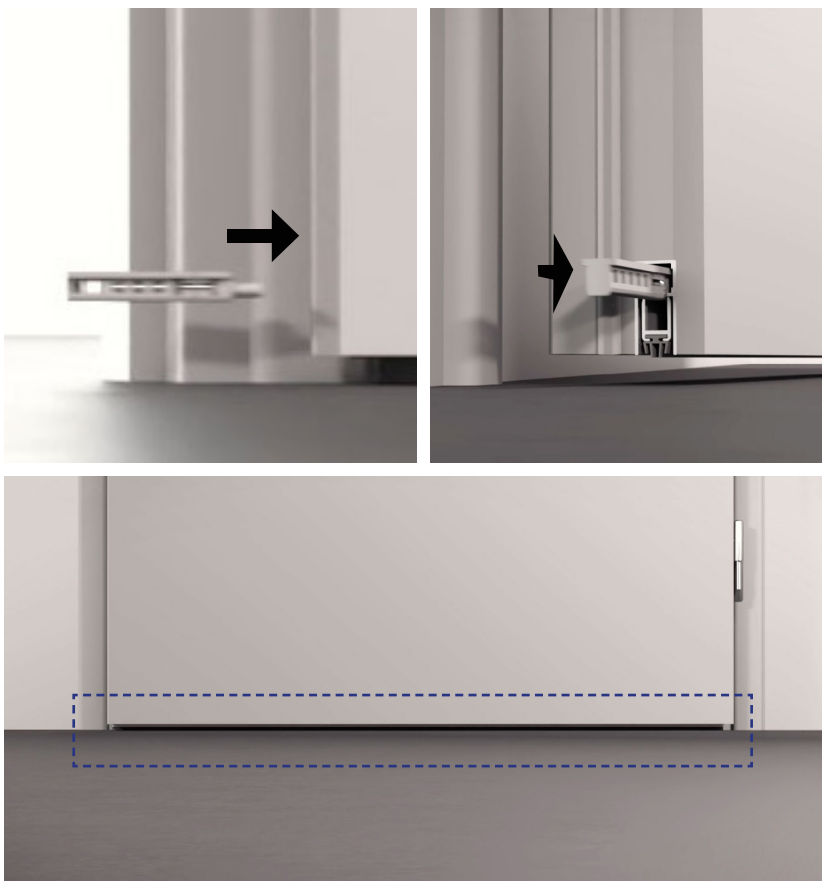

Storage and disposal

Astro Trend should be stored indoors. No shelf life is given as this product will not deteriorate in storage. For further information on installation requirements please contact the technical team on: tel [01329 844 500](tel:01329844500) or email sales@astroflame.com

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as ASTROFLAME (FIRE SEALS) LTD has no control over the specific application or installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product based on the products limitation of applications and that the product is fit for purpose for their intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. ASTROFLAME (FIRE SEALS) LTD, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice. If you are in any doubt as to the suitability of this product for your intended application please contact our technical team on 01329 844500 or email sales@astroflame.com and we will contact you.